
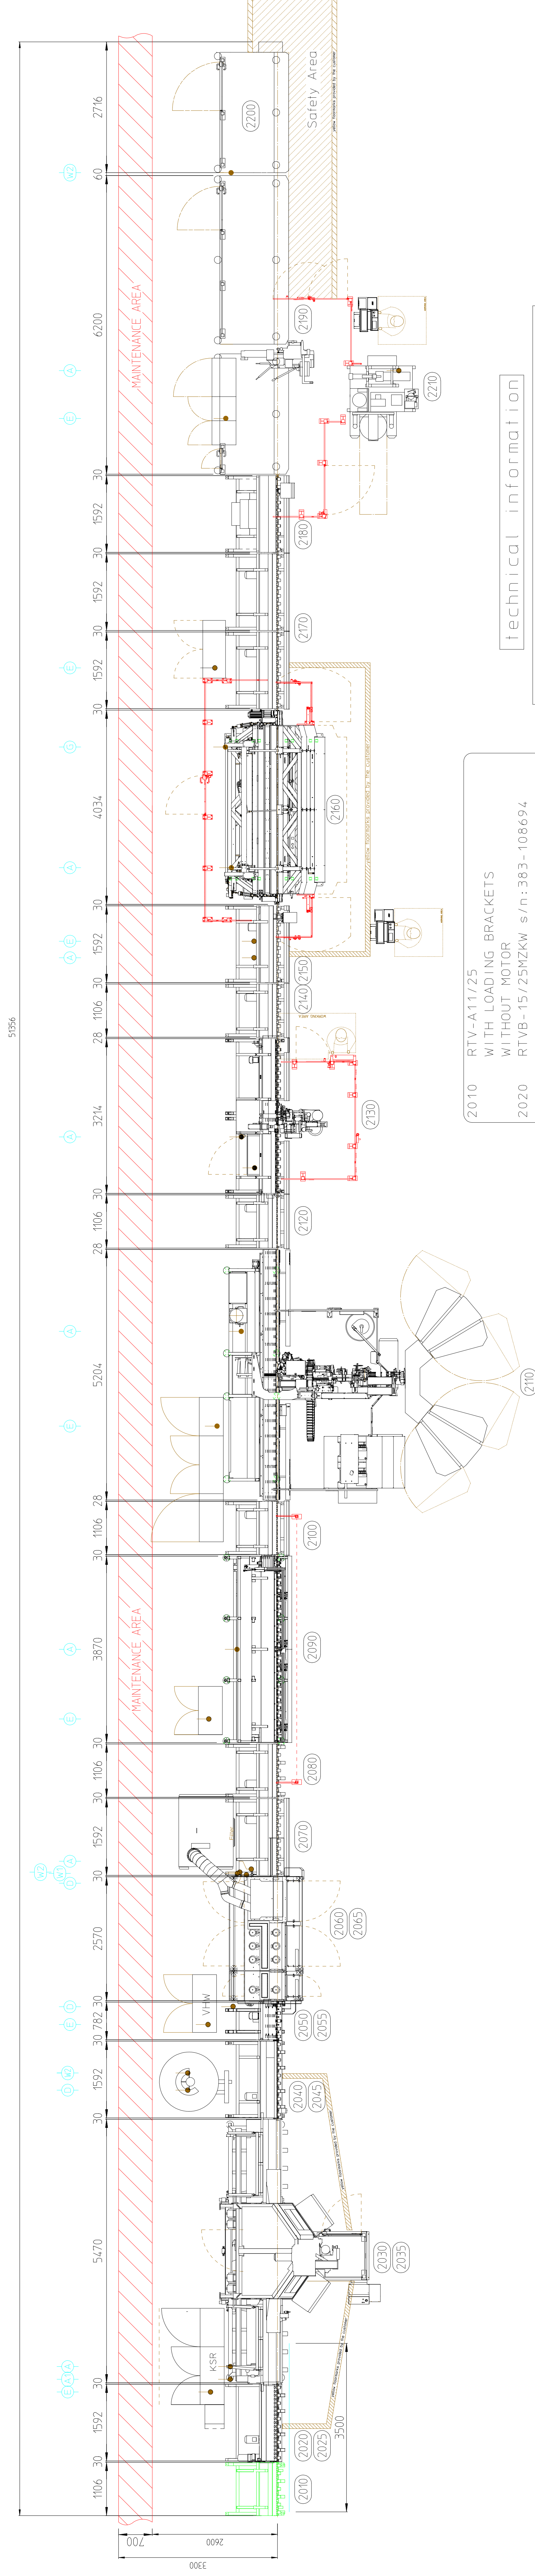


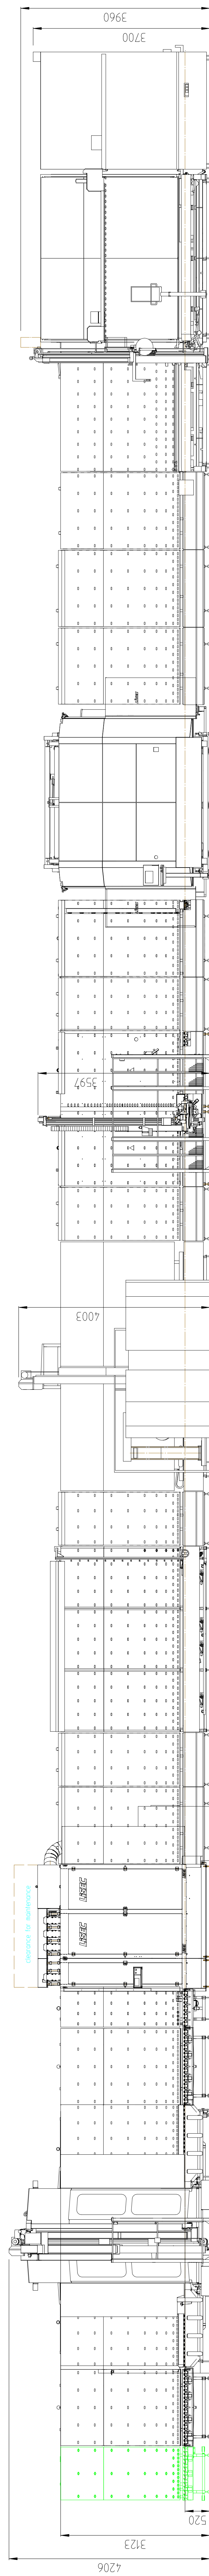

---

technical information

min. glass size: 350x180mm  
max. glass size: 3500x2500mm  
glass thickness: 2.3-19mm  
unit thickness: 12-80mm  
max. load after press: 250kg/m<sup>2</sup>  
production of triple units  
production of shapes  
color: RAL 4004 bordeauxviolet  
transport height: 520 +/-20mm  
inclination: 6°  
year of production: 2018/2019

|      |                                |                        |  |
|------|--------------------------------|------------------------|--|
| 2010 | RTV-A11/25                     | WITH LOADING BRACKETS  |  |
|      |                                | WITHOUT MOTOR          |  |
| 2020 | RTVB-15/25MKW                  | s/n:383-108694         |  |
| 2025 | RTV-MOD                        | s/n:383-108694         |  |
| 2030 | KSR-25                         | s/n:390-128104         |  |
| 2035 | KSR-MOD                        | s/n:390-128104         |  |
| 2040 | RTVB-15/25WEK                  | s/n:380-108699         |  |
| 2045 | RTV-MOD                        | s/n:380-108699         |  |
| 2050 | RTVB-08/25WEK                  | s/n:380-106620         |  |
| 2055 | RTV-MOD                        | s/n:380-106620         |  |
| 2060 | VHM-D25/V6                     | s/n:313-104621         |  |
| 2065 | WITH ADDITIONAL PAIR OF BRSHES |                        |  |
|      |                                | WITH COATING DETECTION |  |
| 2065 | VHM-MOD                        | s/n:313-104621         |  |
| 2070 | RTVB-15/25ST                   | s/n:380-104622         |  |
| 2075 | RTVB-11/25WE                   | s/n:380-104617         |  |
| 2080 | RSWN-35/25U                    | s/n:322-104623         |  |
| 2090 | WITH OFFSET BACKWALL 500mm     |                        |  |
|      |                                | WITH LED               |  |
| 2100 | RTVN-11/25ST                   | s/n:380-106974         |  |
| 2110 | VSA-35/25                      | s/n:410-106975         |  |
|      | WITH BUTYLE APPLICATOR         |                        |  |
|      | WITH DOUBLE TRACK APPLICATION  |                        |  |
|      | WITH 2x4 REEL MAGAZINE         |                        |  |
| 2120 | RTVN-11/25ST                   | s/n:380-106976         |  |
| 2130 | SSW-25                         | s/n:410-106977         |  |
| 2140 | RTVB-11/25ST                   | s/n:380-104628         |  |
| 2150 | RTVB-15/25MU2                  | s/n:383-104629         |  |
| 2160 | FPS-35/25U28                   | s/n:343-104630         |  |
| 2170 | RTVB-32/25ST                   | s/n:380-104631         |  |
| 2180 | VL-15/25VEE                    | s/n:385-104632         |  |
| 2190 | VL-IN/25                       | s/n:361-104802         |  |
| 2200 | DOS-11H                        | s/n:366-104803         |  |
|      | POLYSULFID FENZ1 THIOVER       |                        |  |
| 2210 | VLA-25/25                      | s/n:362-104633         |  |

PROPRIETARY AND CONFIDENTIAL according to ISO16016  
The reproduction, distribution, modification and utilization of this document as well as  
the communication of its contents to others without express written authorization  
from LUSEC is prohibited.

JEI

VERTICAL PLANT

|    | Datum      | Name    |
|----|------------|---------|
| 2. | 21.07.2026 | Indesol |

|      |            |       |
|------|------------|-------|
|      | Date       | Name  |
| Z:   | 27/07/2026 | 13-26 |
| Part |            |       |

DO NOT SCALE DIMENSIONS OF THIS DRAWING!  
All power connections (and safety cals) have to be provided and performed by the customer.

Änderungstext

Noventa di Piave

60